


## ASSEMBLY INSTRUCTIONS

1. Begin assembling the legs and work upwards.
2. Arms should be placed onto tubes before they are joined.
3. Do not tighten bolts until rack is fully assembled and tubes are properly aligned.
4. Adjust height of arms before they bear any weight.
5. Make sure that all bolts are tight before using.

Note: Slide arms on tubes before inserting bolts.

Allen head bolt

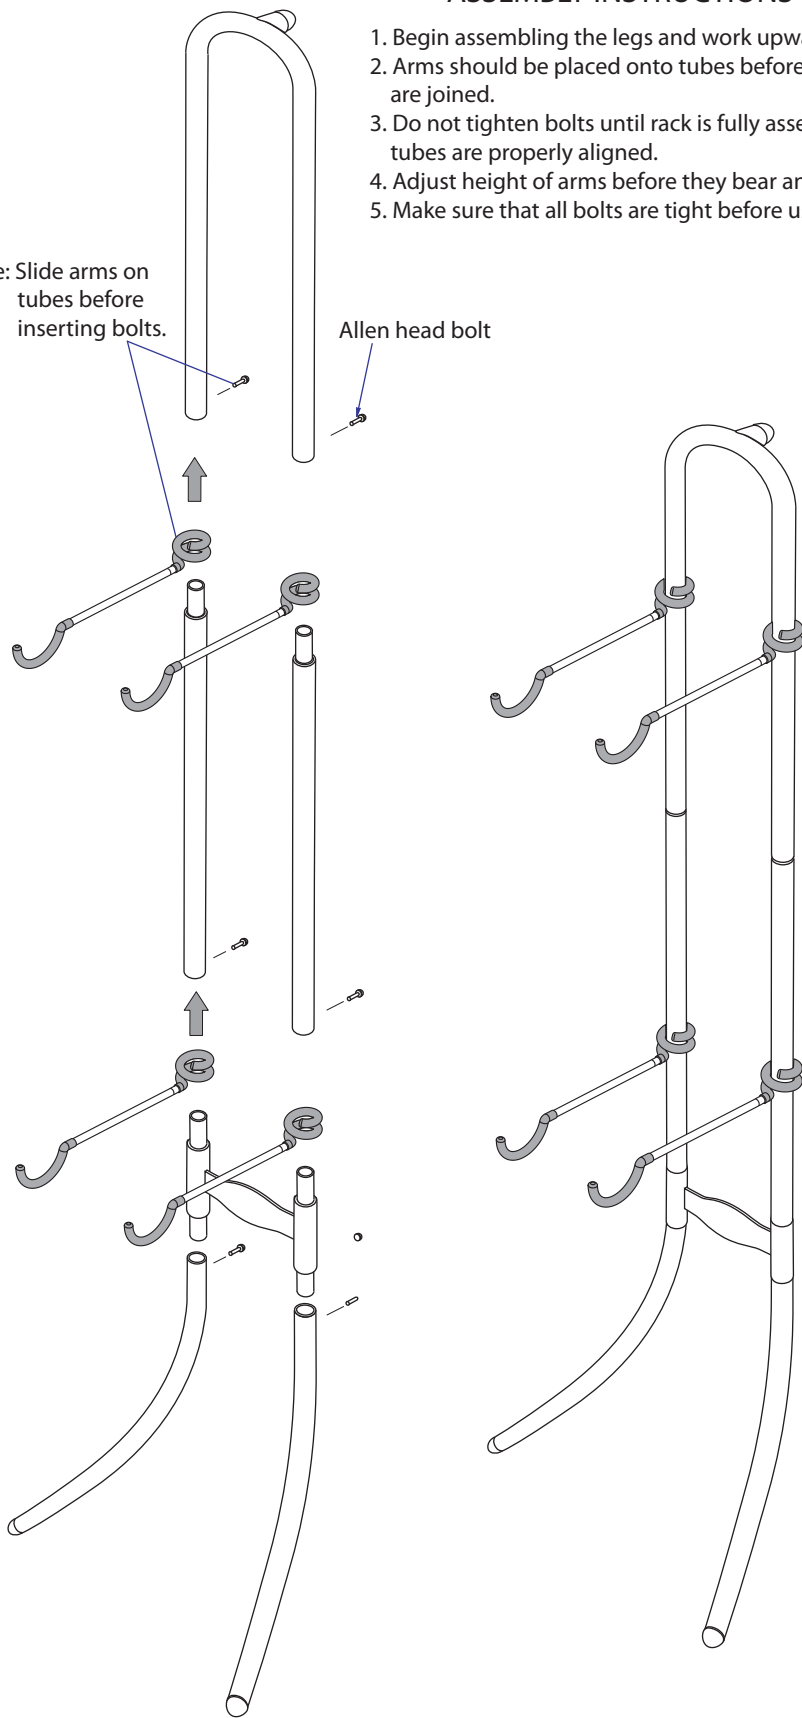

## IMPORTANT WARNING:


**DO NOT EXCEED MAXIMUM  
TOTAL WEIGHT LIMIT OF  
100 LBS (45.4 Kgs)**

**MAX LOAD Per Hook  
25 LBS (11.4 kgs)**

**MAX WEIGHT Per Bike  
50LBS (22.7 kgs)**

## IMPORTANT SAFETY

In order to avoid accidental toppling of the rack, a wall stabilizing chain is supplied. This should be attached to the rack at one end with the bolt provided. The other end of the chain should be secured to the wall using a screw that is suitable for the type of wall construction. If in doubt, consult your hardware merchant for the correct method of fixing based on the wall construction.

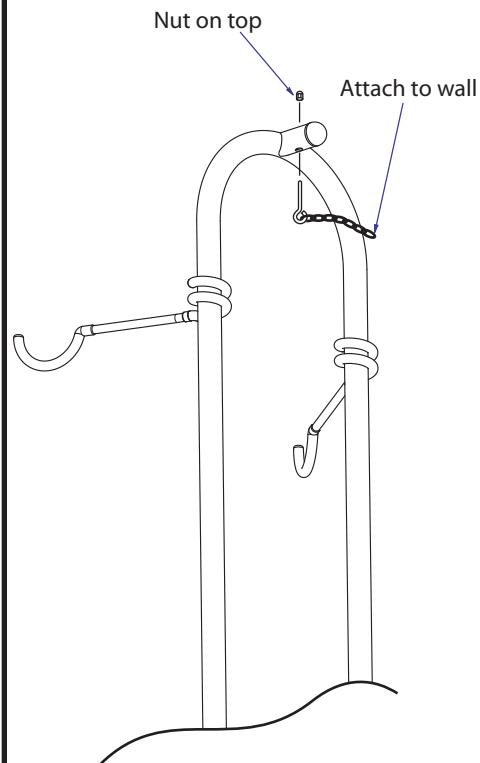

Delta Cycle Corporation  
125 Washington Street  
Foxborough, MA 02035 USA

MICHELANGELO RS6002  
ASSEMBLY DIAGRAM

© Copyright 2006