


**CUSTOMER SERVICE : 1-800-474-6615  
Please Call if you have any questions.**

**TIP#1:** Wait to fully tighten bolts, until all parts of rack are assembled.  
**TIP#2:** Assemble rack from the bottom to the top.

PATENTS PENDING  
© Copyright 2008

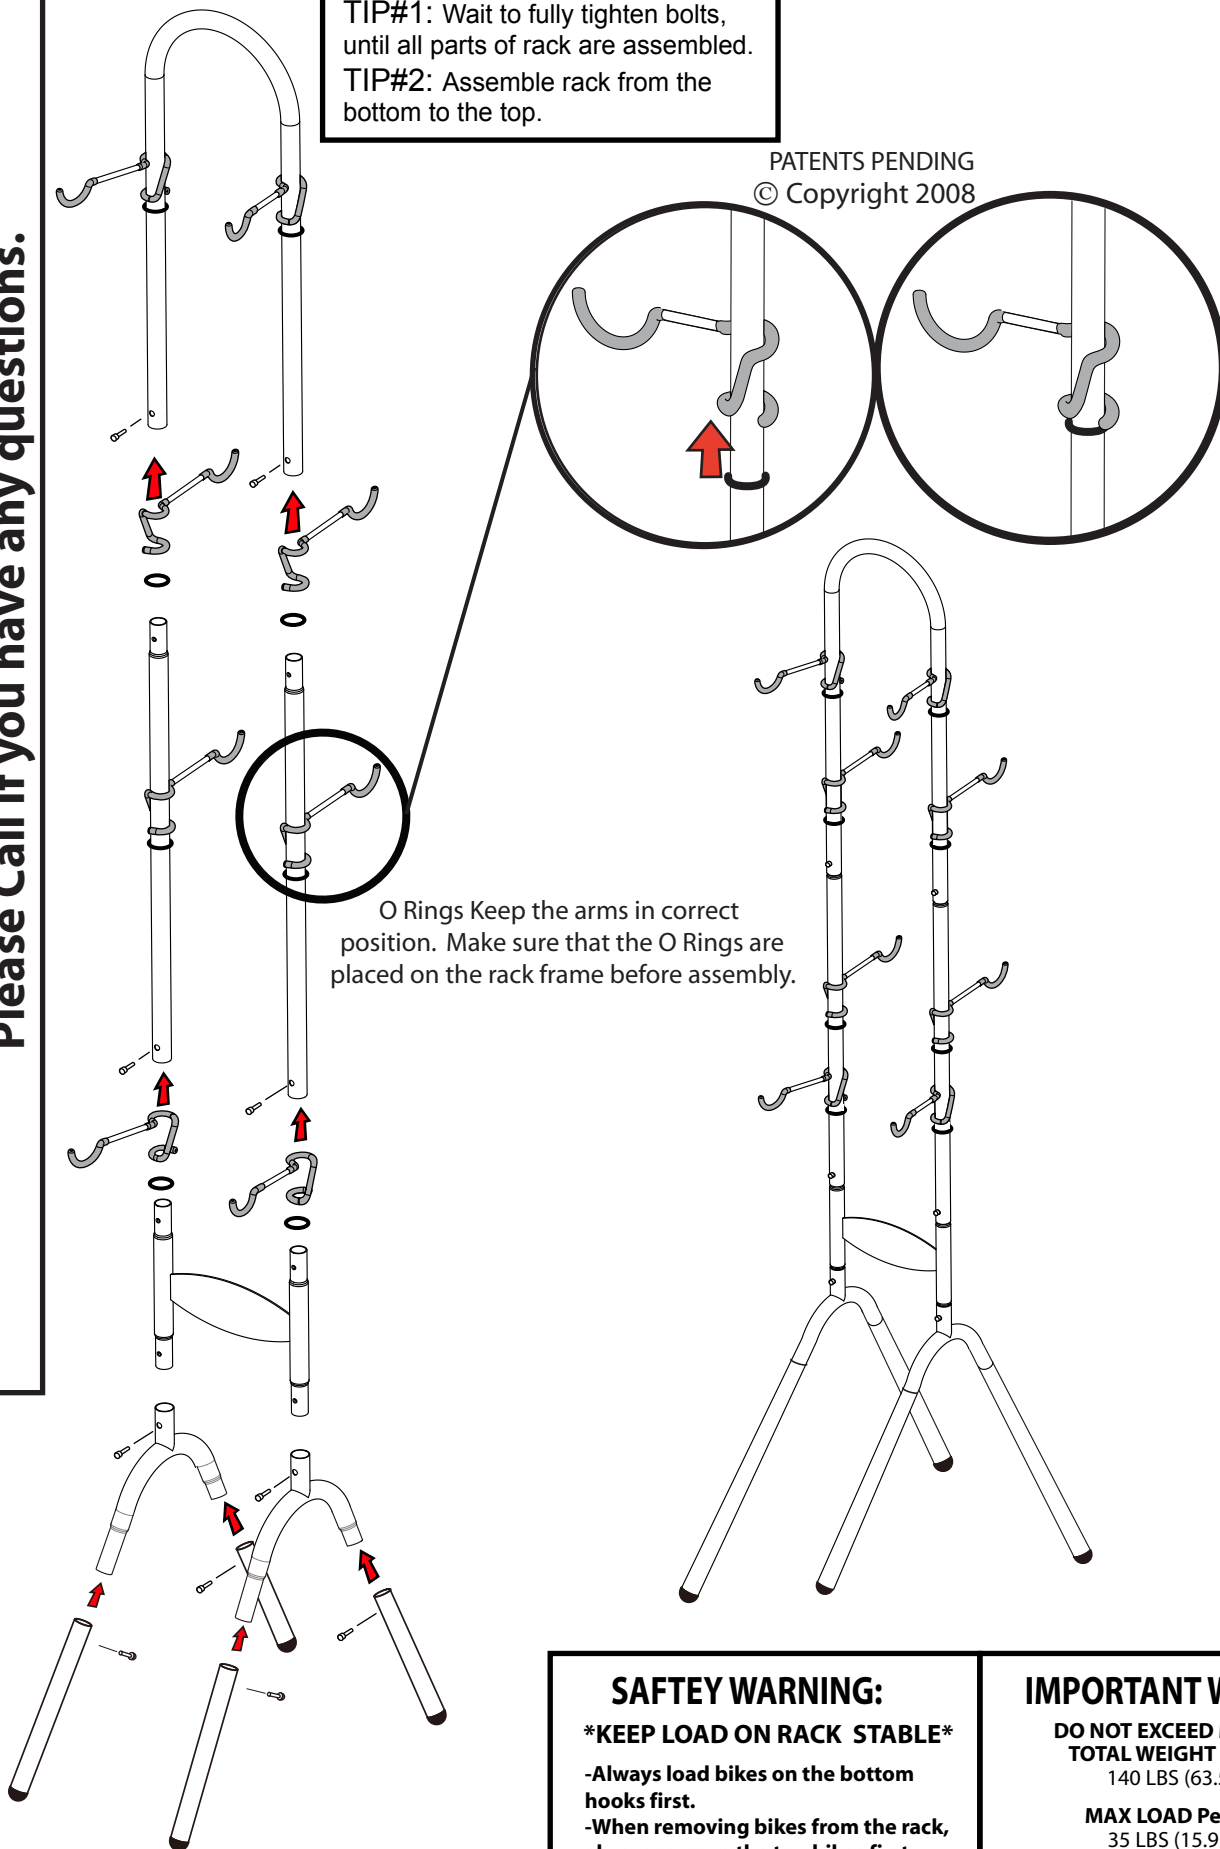

O Rings Keep the arms in correct position. Make sure that the O Rings are placed on the rack frame before assembly.

**SAFETY WARNING:**

- \*KEEP LOAD ON RACK STABLE\***
- Always load bikes on the bottom hooks first.
- When removing bikes from the rack, always remove the top bikes first.
- Never have two bikes loaded on one side only.

**IMPORTANT WARNING:**

- DO NOT EXCEED MAXIMUM TOTAL WEIGHT LIMIT OF**  
140 LBS (63.5 kgs)
- MAX LOAD Per Hook**  
35 LBS (15.9 kgs)
- MAX WEIGHT Per Bike**  
40LBS (18.2 kgs)

© Copyright 2008

BOTTICELLI RS6500  
ASSEMBLY DIAGRAM

Delta Cycle Corporation  
125 Washington St. Unit #7  
Foxborough, MA 02035 USA  
1-800-474-6615

